
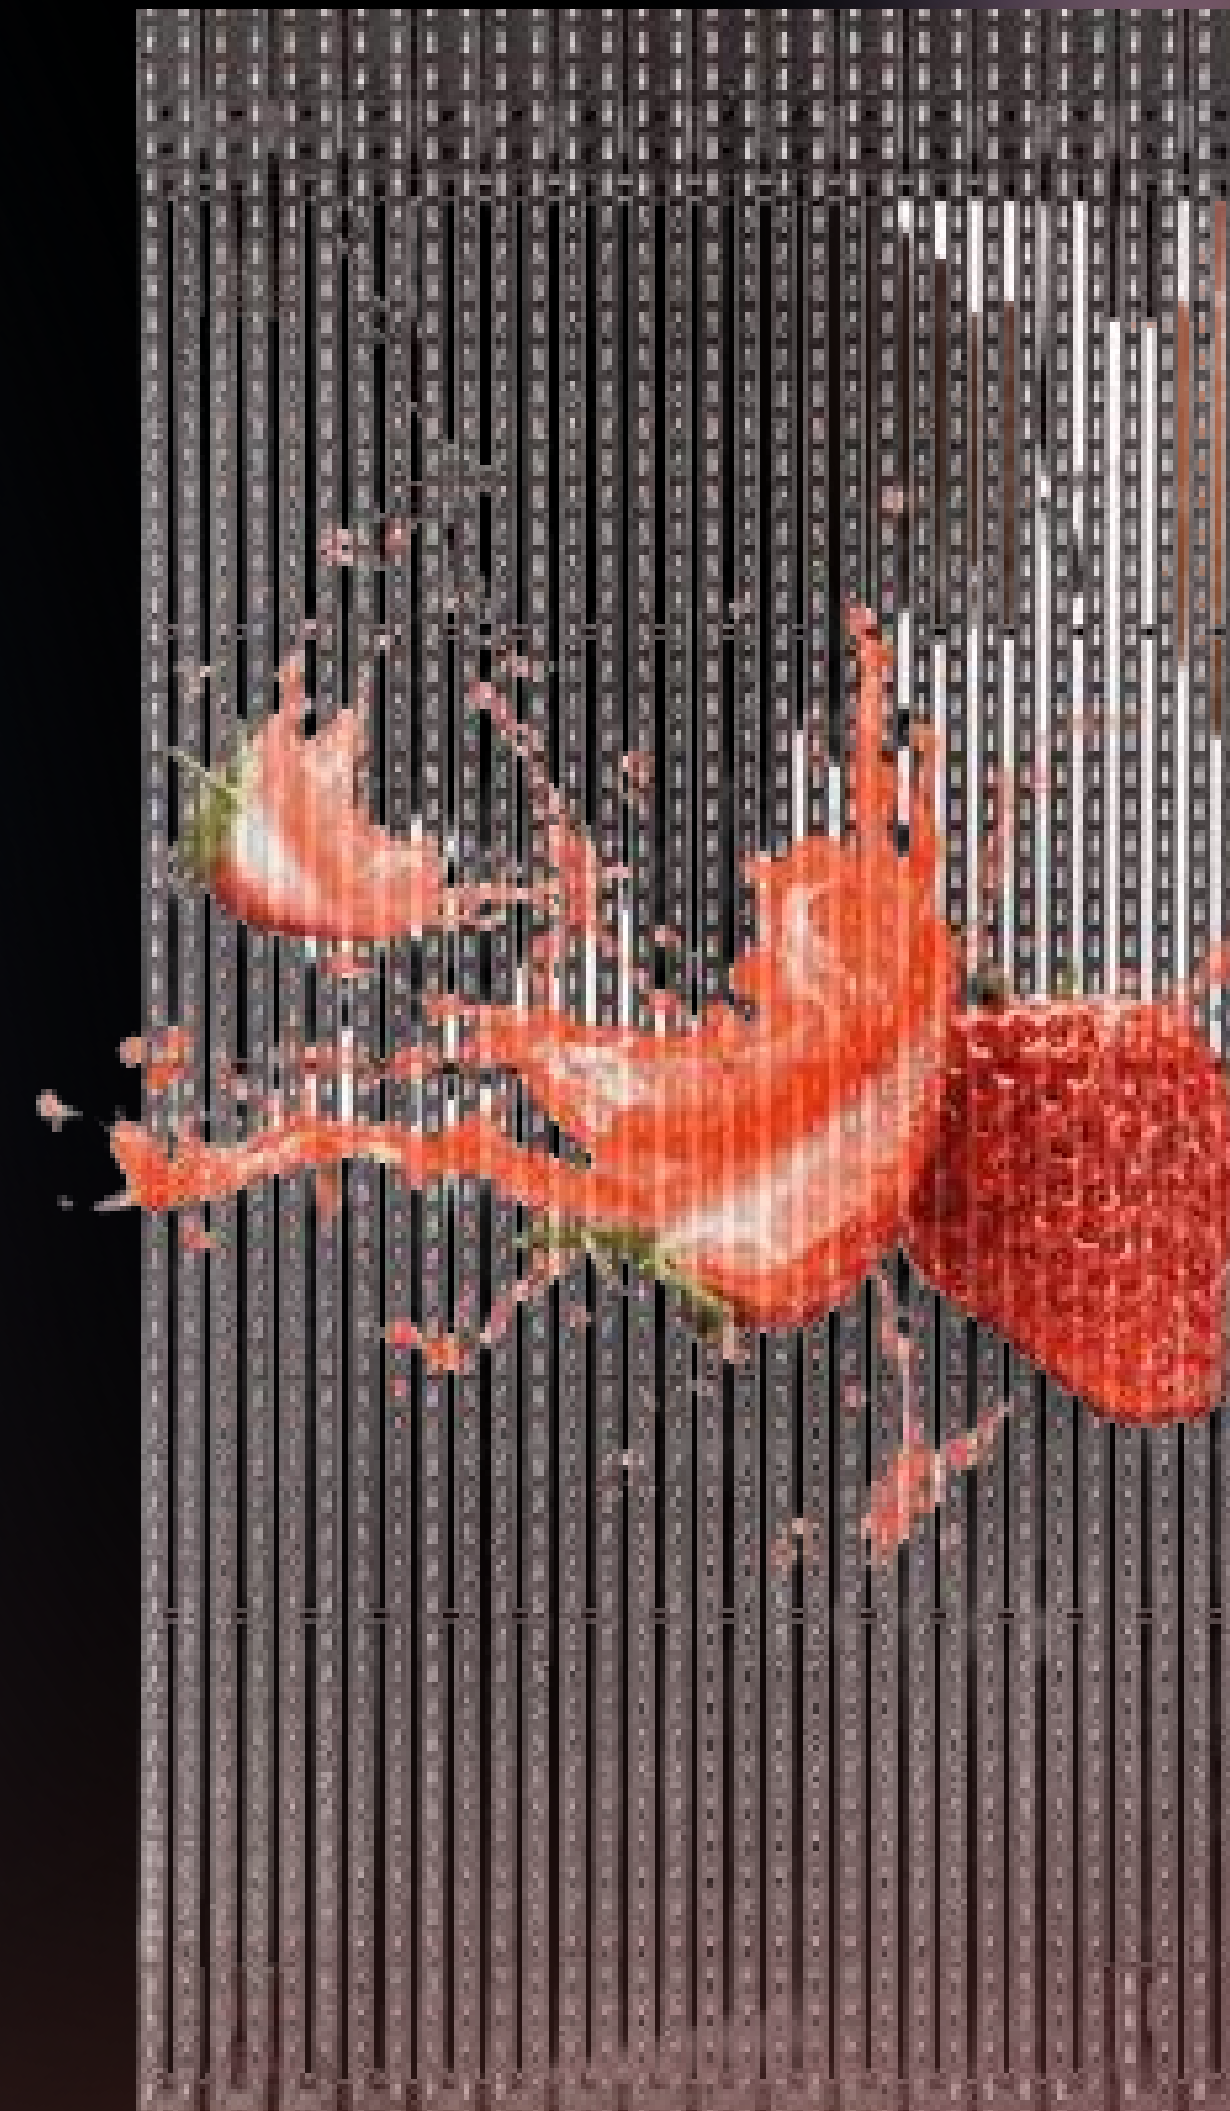


Outdoor glass SL-A series

Pixel Pitch: P10mm DIP/15.6mm DIP

- ✓ **Aluminum & Light Weight Cabinet**
- ✓ **High Transparency**
- ✓ **Customizable Design**
- ✓ **Easy Installation and Maintenance**
- ✓ **Long Outdoor Durability**
- ✓ **Superior Performance**

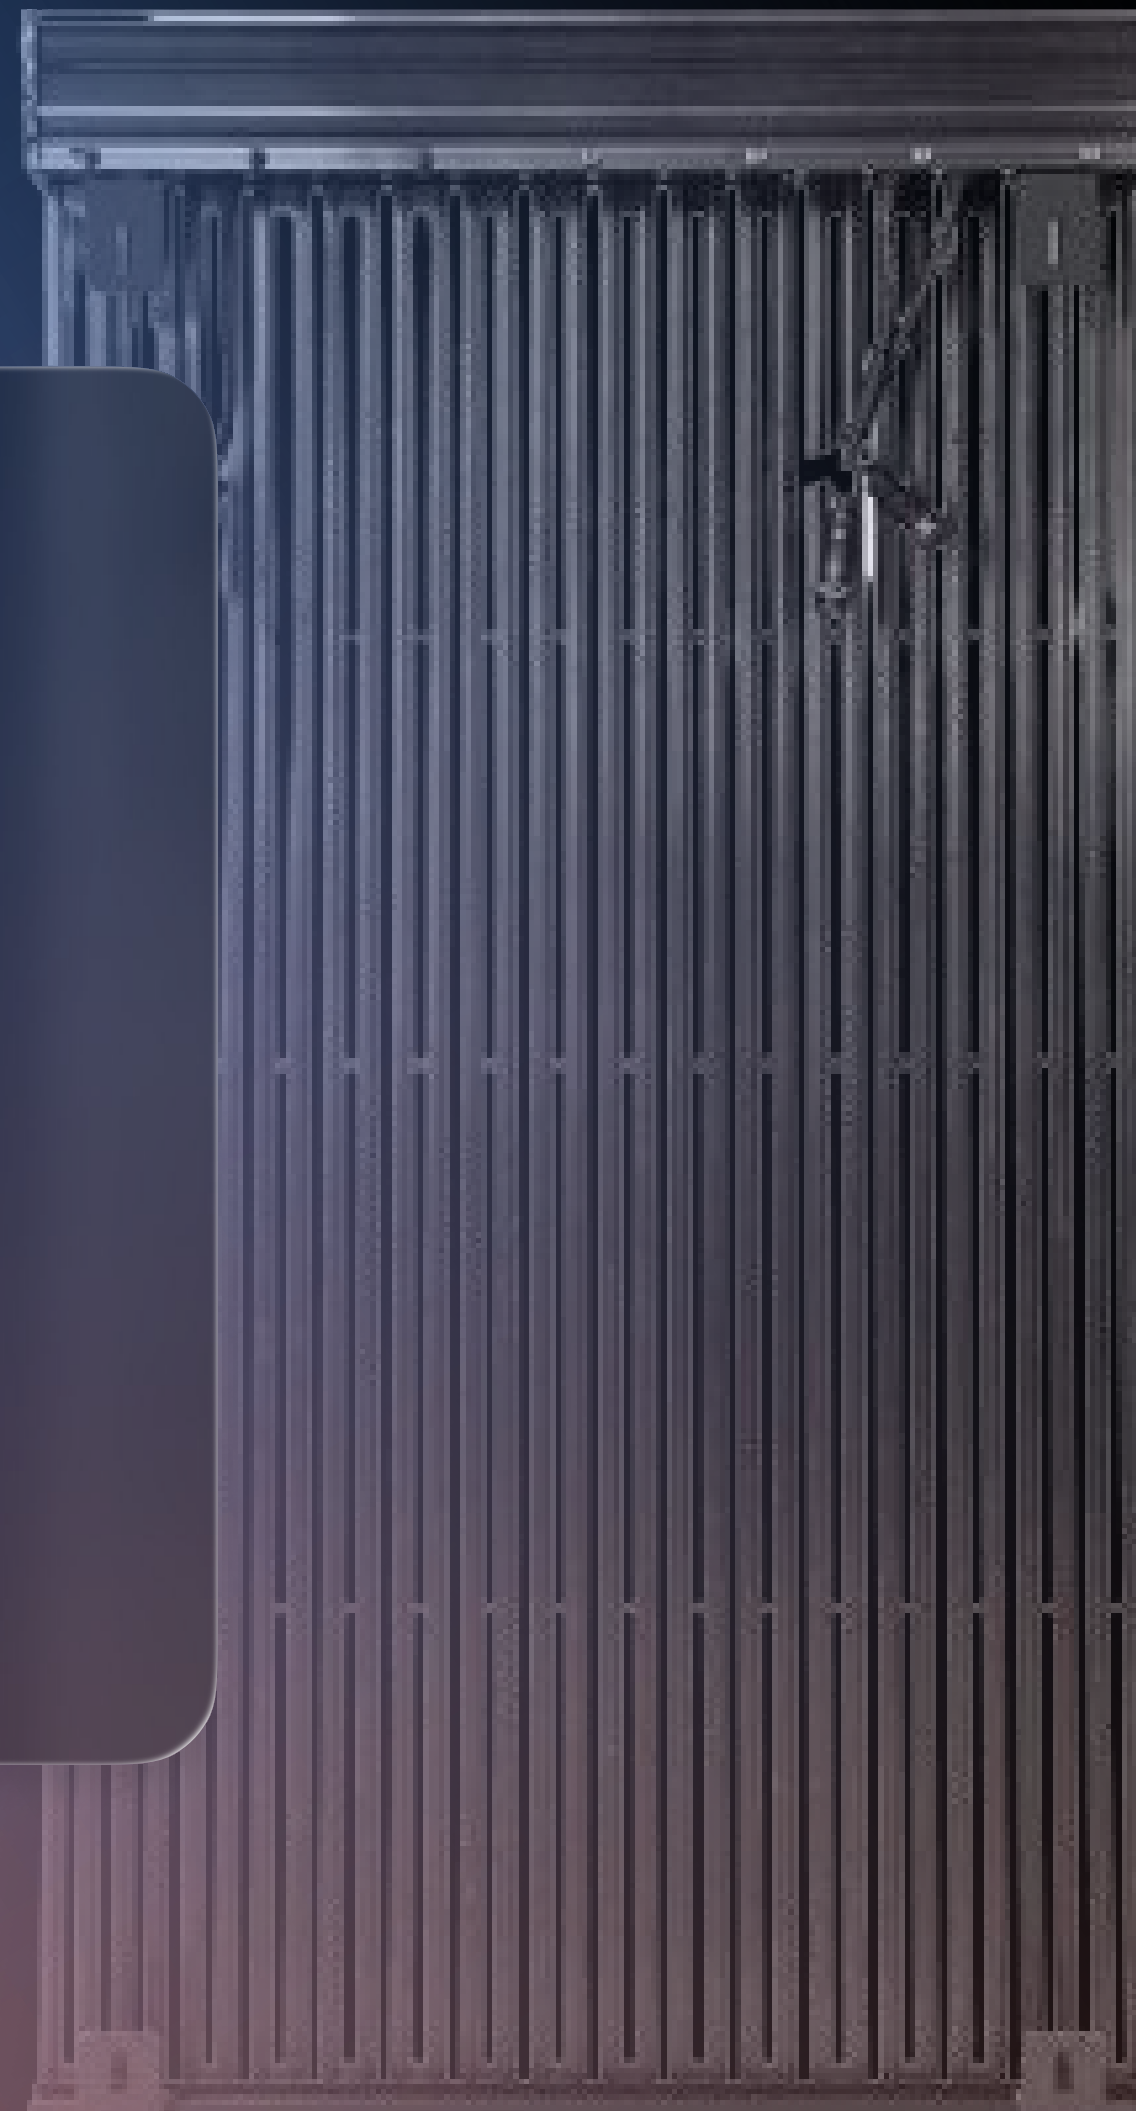


Product details & specifications



Customized Design & Solution

High performance

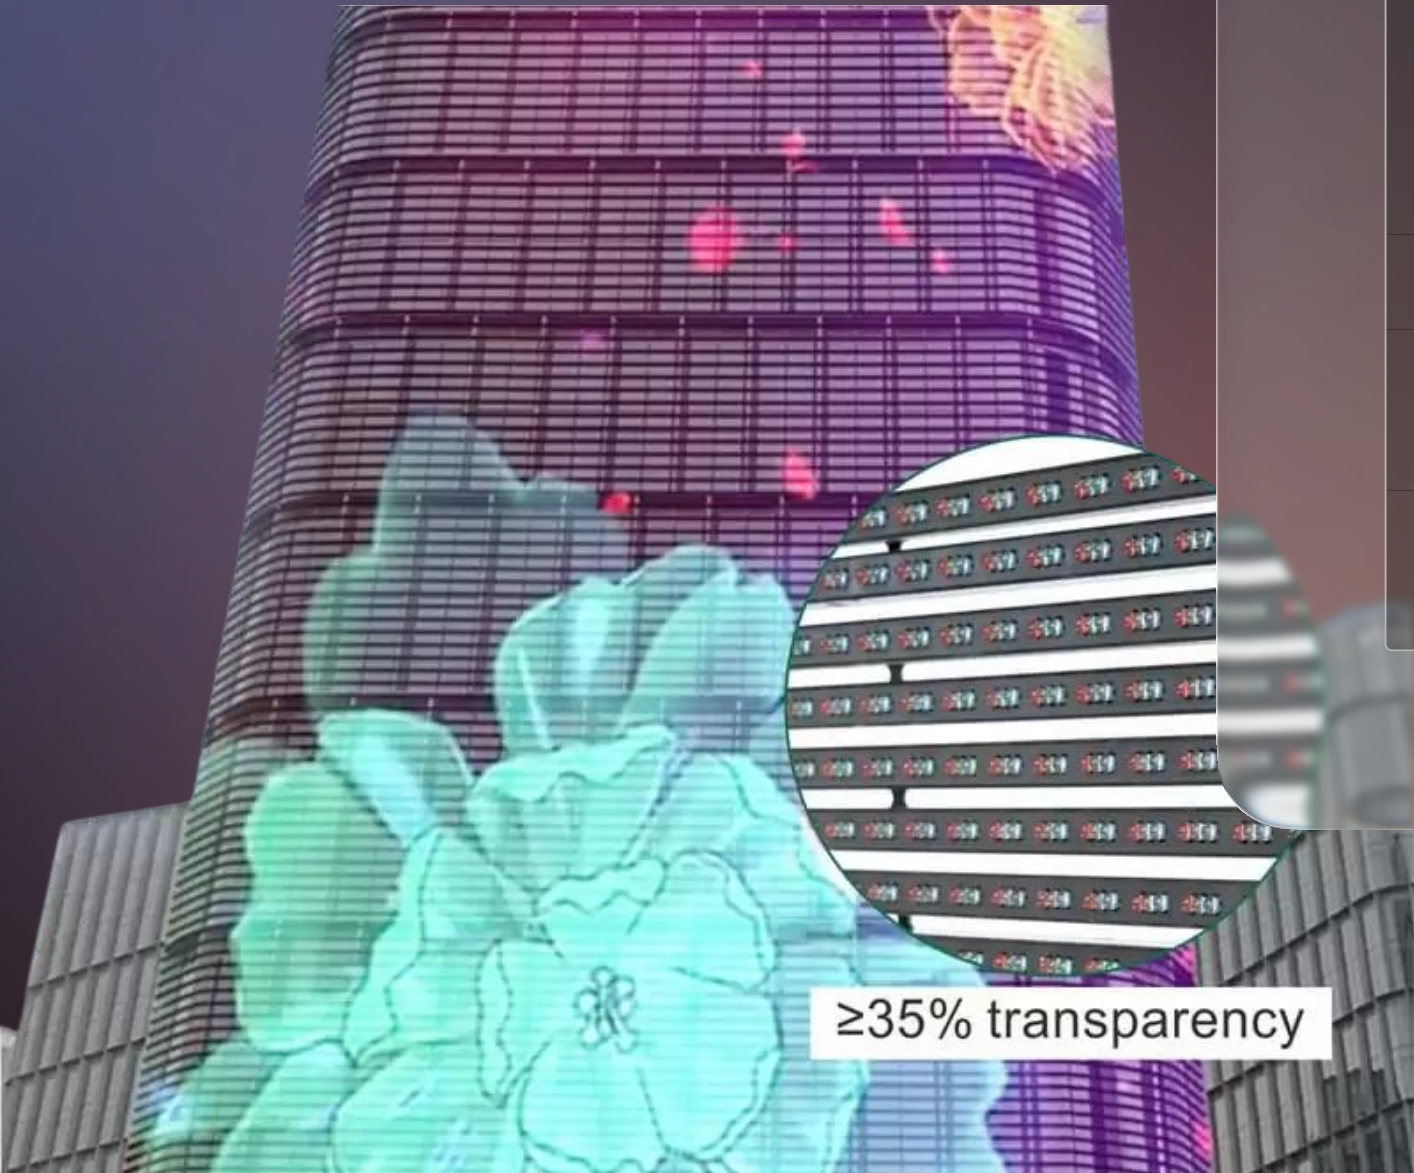

≥35% transparency

Specifications	7.8/15.6	15.6/15.6	15.6/31.2	25/25	31.25/31.25
LED types	SMD3535	SMD3535	SMD3535	DIP346	DIP346
Pixel density	8192	4096	2048	1600	1024
Transparency rate	45%	45%	60%	50%	60%
Cabinet material	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Cabinet size	500mm*1000mm	500mm*1000mm	500mm*1000mm	500mm*1000mm	500mm*1000mm
Cabinet weight	15	13	12	9	8
Maintenance way	Front & Back	Front & Back	Front & Back	Front & Back	Front & Back
Brightness (adjustable)	>8000nits	>8000nits	>7000nits	>6500nits	>6500nits
Viewing Angle	160°/160°	160°/160°	160°/160°	160°/160°	160°/160°
Scanning mode	Static	Static	Static	Static	Static
Refresh Rate(Hz)	>3840Hz	>3840Hz	>3840Hz	>3840Hz	>3840Hz
Max. power consumption (W/m²)	800	800	400	350	220
Ave. power consumption (W/m²)	240	240	120	100	80
Protection (IP) Ratin	IP67	IP67	IP67	IP67	IP67
Power	AC90-264V 47-63Hz	AC90-264V 47-63Hz	AC90-264V 47-63Hz	AC90-264V 47-63Hz	AC90-264V 47-63Hz
Operating Temperature/Humidity (°C/RH)	-20~60°C / 10%-85%				