




Flexible LED Mesh Curtain

- ✓ Exceptional 75% Transparency
- ✓ Wide Operating Temperature Range: -40°C to +60°C
- ✓ Long-lasting Outdoor Use with Waterproof Rating IP66
- ✓ Utilizing Nationstar LEDs for Energy Efficiency
- ✓ Resistant to UV Damage
- ✓ Superb Imaging with 16-bit Gray Scale

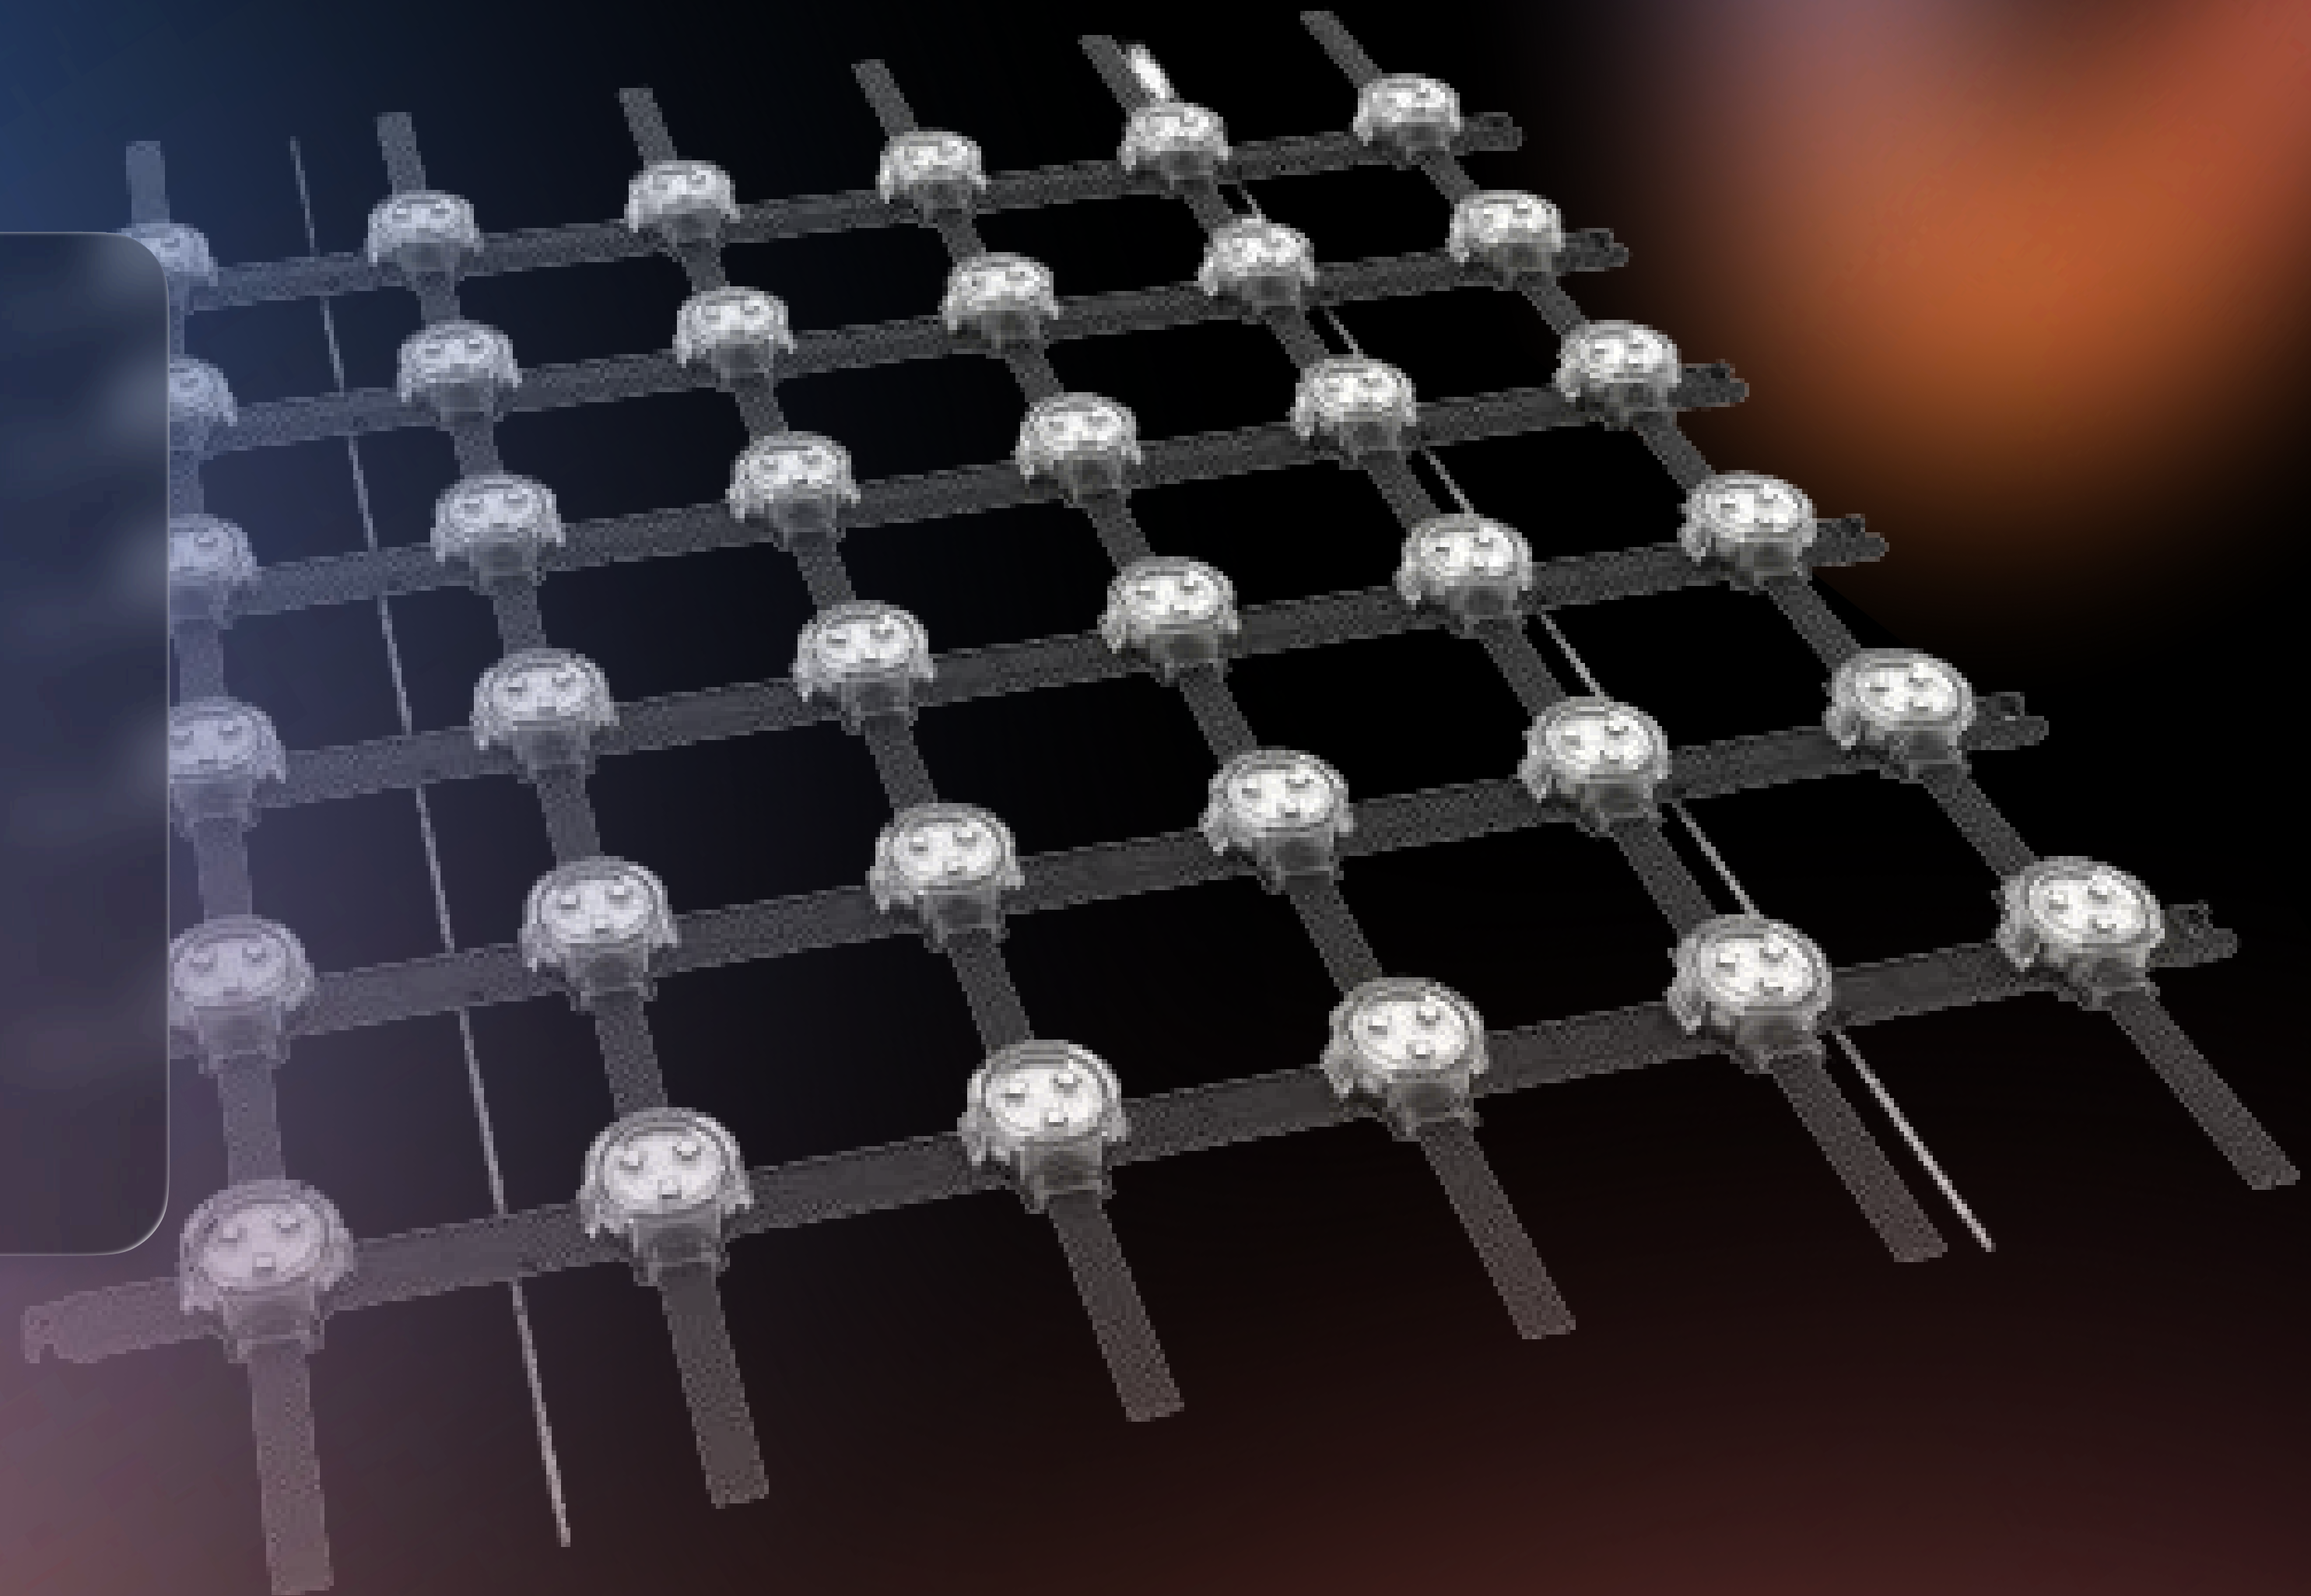

Product details & specifications

For Creative Projects

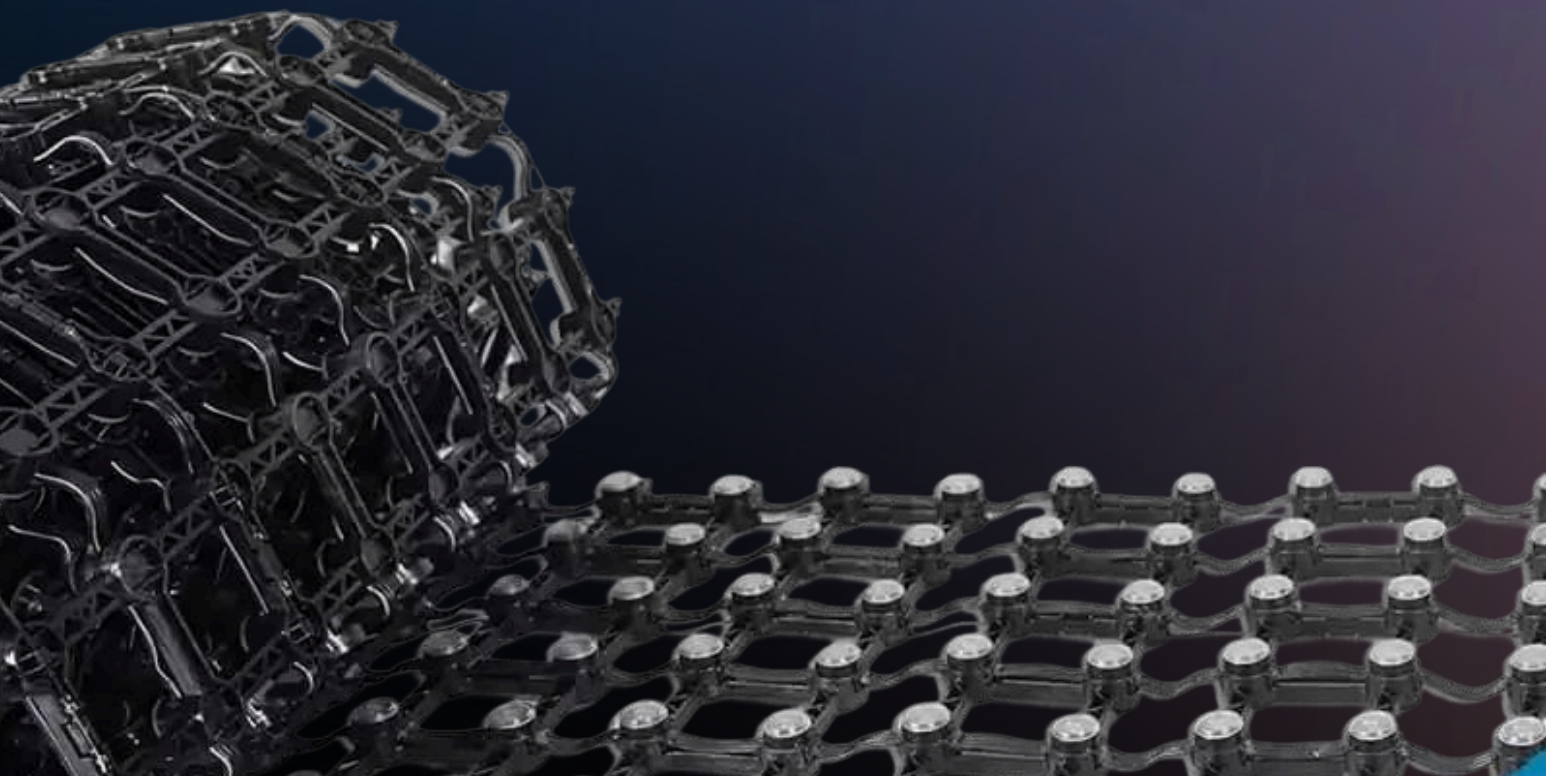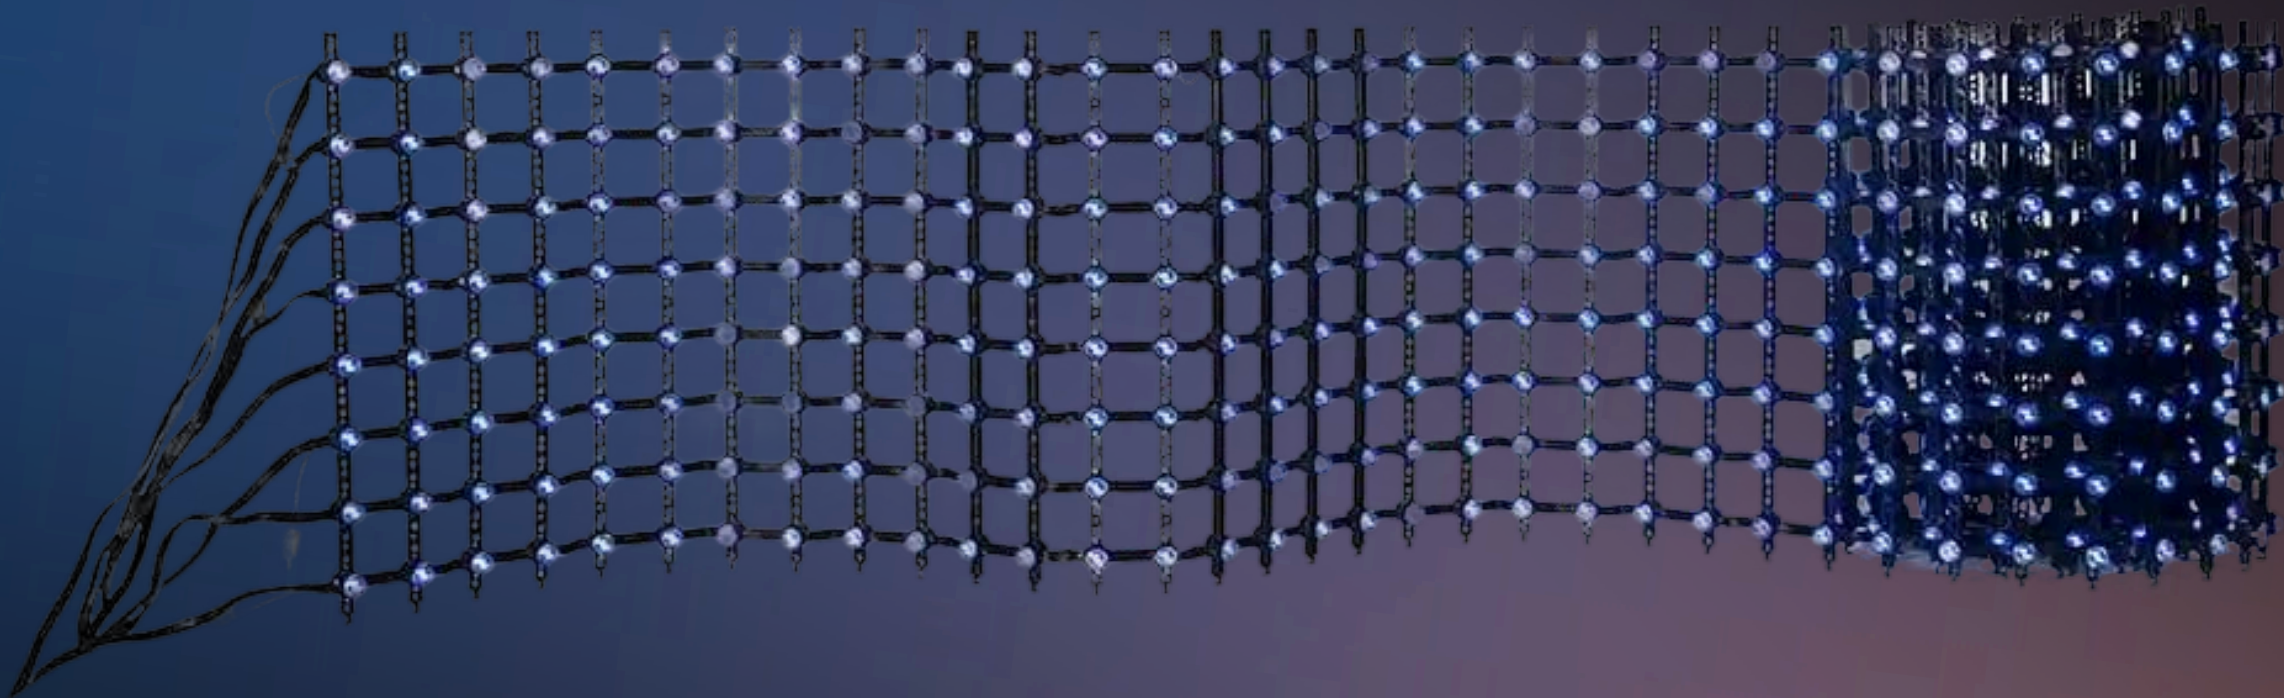

Specifications	P31.25, P41.67, P50, P55, P71.43mm
Pixel Configuration	SMD3535/5050
Panel Size	500mm length (Size can be customized)
Brightness	3000nits -9600nits (can be customized)
Transparency Rate	55% -85%
Weight	Pixel weight 8g/PCS+ Frame weight 9g/PCS
IP Rating(Front/Rear)	IP67
Refresh Rate	1000 – 3000 Hz
Scan Mode	Static
Max Power Consumption	350W- 800 W/sqm
Color Processing	16 bit
Viewing Angle (H/V)	140°/110°
Operating Temperature	-30°C ~ 50°C
Main Power Source	AC 100-240V; 50/60Hz
Input Voltage	15V DC
Humidity	10~90%RH
Life Time	100,000 Hours