

Display SL-C series

Pixel Pitch: P1.25/1.53/1.66/1.86/2/2.5mm


✓ Slim design: thickness 33mm

✓ Light weight: <5.8kg</p>

Completely front access, easy for maintenance

✓ Wireless connection, more stable

✓ Hight contrast & Refresh rate

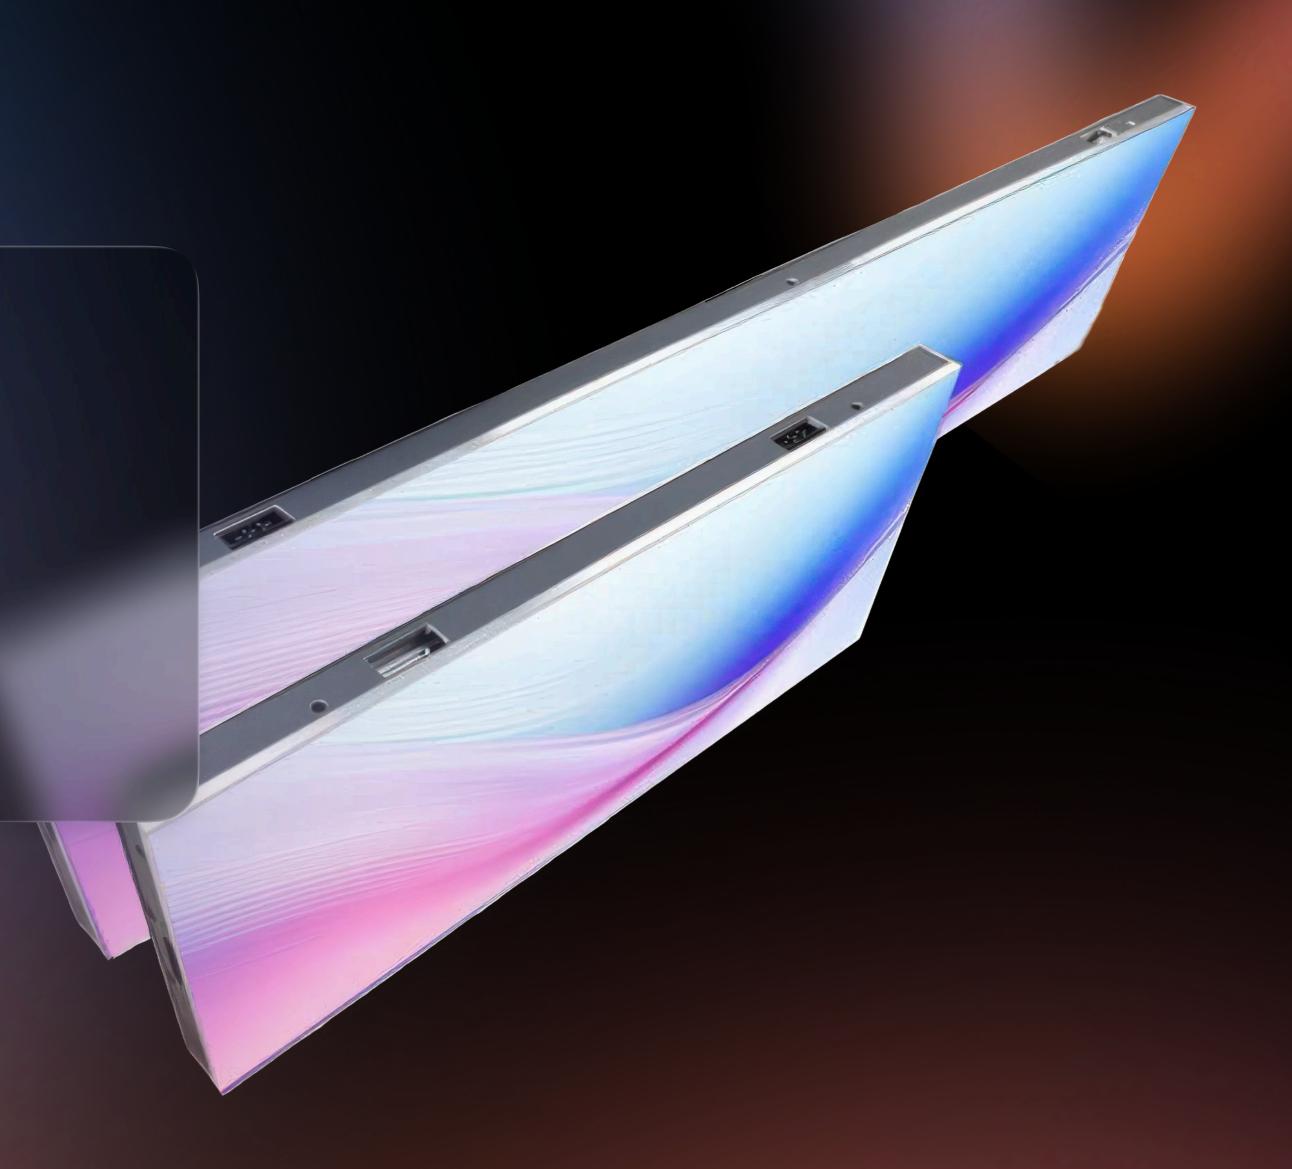

Product details & specifications


Multiple sizes are available 500X250X33mm 750X250X33mm

1000X250X33mm





Hot swapping & Wireless connection

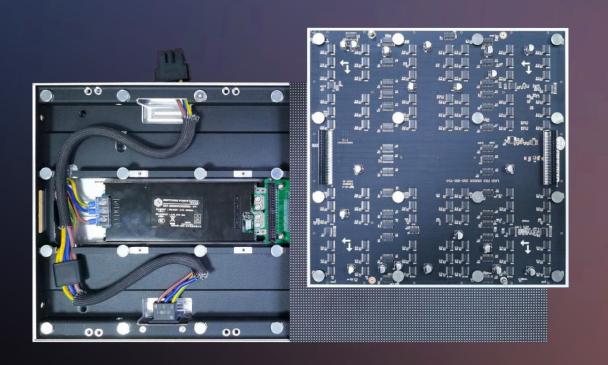



Pixel Pitch	P1.25	P1.56	P1.95	P2.5	P2.064	2.976	3.91
LED Types	SMD1010	SMD1212	SMD1515	SMD1515	SMD1515	SMD1515	SMD1515
Pixel Density (Dots/ m²)	640000	409600	262144	160000	147456	112896	65536
Module resolution	200*200	160*160	128*128	100*100	96*96	84*84	64*64
Module size	250mm*250mm	250mm*250mm	250mm*250mm	250mm*250mm	250mm*250mm	250mm*250mm	250mm*250mm
With or Without Mask	GOB	GOB	GOB/No mask	GOB/With mask	GOB/With mask	GOB/With mask	GOB/With mask
	1000mmx250mm	1000mmx250mm	1000mmx250mm	1000mmx250mm	1000mmx250mm	1000mmx250mm	1000mmx250mm
Cabinet size		750mmx250mm	750mmx250mm	750mmx250mm	750mmx250mm	750mmx250mm	750mmx250mm
		500mmx250mm	500mmx250mm	500mmx250mm	500mmx250mm	500mmx250mm	500mmx250mm
Cabinet depth with modules				33mm			
Brightness Carlibration				Have			
Cabinet resolution(1000X250 mm)	800*200	640*160	512*128	400*100	384*96	336*84	256*64
Cabinet resolution(750X250mm)	600*200	480*160	384*128	300*100	288*96	252*84	192*64
Cabinet resolution(500X250mm)	400*200	320*160	256*128	200*100	192*96	168*84	128*64
Maintenance way				Front access			
Cabinet material				Profile aluminum			
Brightness (Nits/m2)	500	500	800	900	900	900	1000
Viewing Angle				140°/140°			
Scanning	1/50	1/40	1/32	1/25	1/32	1/28	1/16
Refresh Rate(Hz)				3840			
Max. power consumption (W/m²)				400			
Ave. power consumption (W/m²)				150			
Protection (IP) Rate				IP40			
Power				AC90-264V 47-63Hz			
Operating Temperature/ Humidity (°C/RH)				-20~60 °C / 10%-85%			