

HD SL-B Flex


Pixel Pitches: P0.78/P0.93/P1.25/P1.56/1.87mm

- ✓ Flexible in creative shapes
- ✓ 16:9 Perfect Sizing
- ✓ High Reliability
- ✓ Silent Running
- ✓ Compact & Lightweight
- ✓ Superior Heat Dissipation Performance
- ✓ Seamless Splicing




Product details & specifications


Small cabinet, Big performance

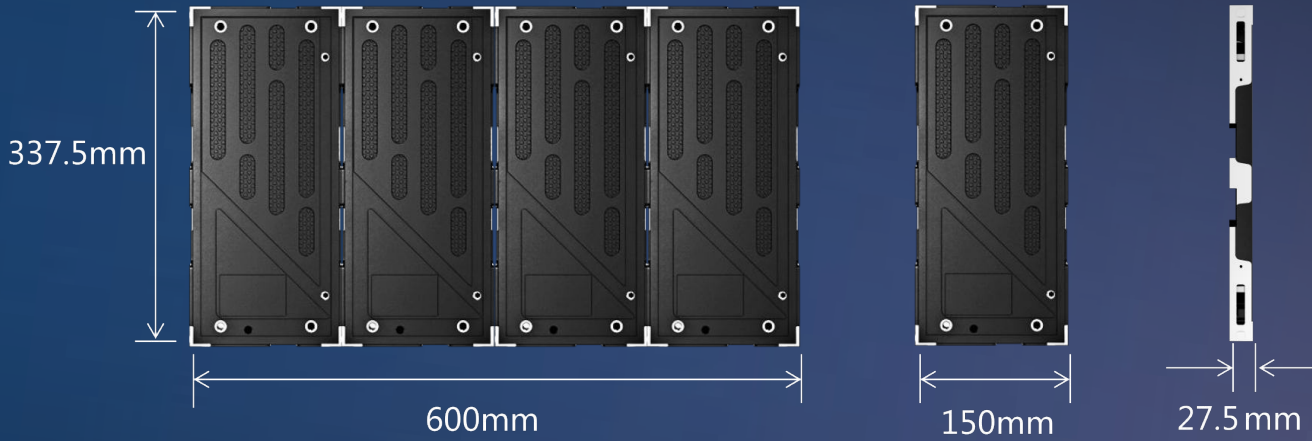

Full front maintenance

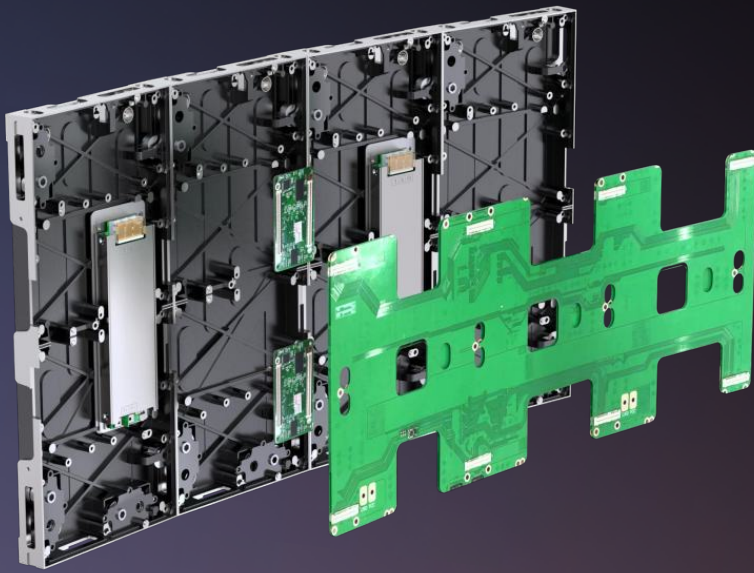

Seamless splicing

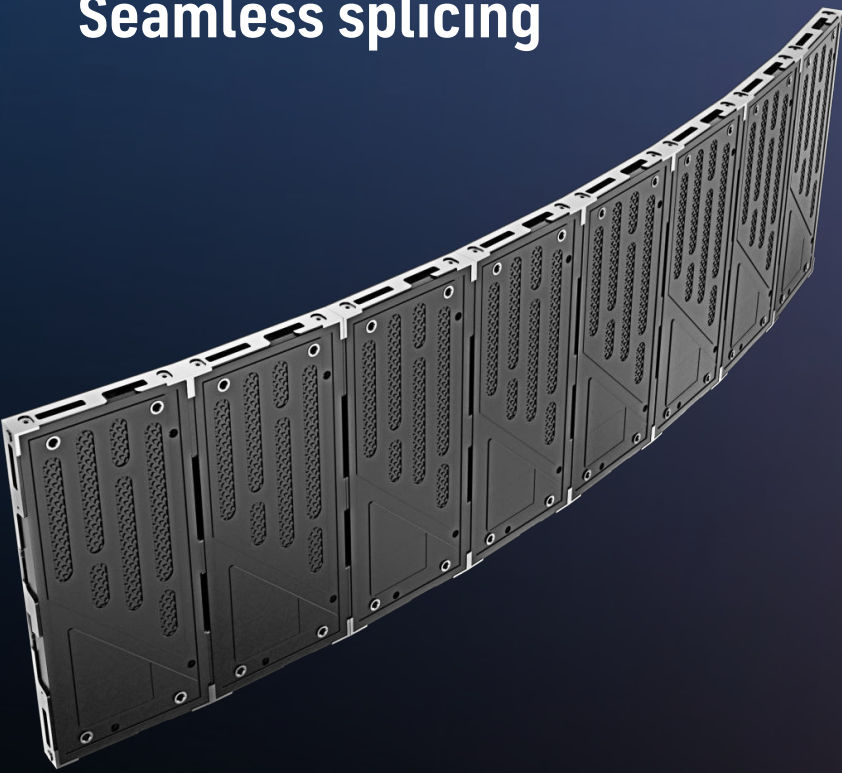

Combine with HD SL-C cabinet (600X337.5mm)



Pixel Pitch	P0.78	P0.93	P1.25	P1.56	P1.975
LED Type	Mini 4in1	Mini 4in1	SMD1010	SMD1010/1212	SMD1010/1515
Physical density (Dot/sqm)	1638400	1137778	640000	409600	284444
Module resolution	192X216	160X180	240X135	192X108	160X90
Module size (mm)	150X168.75	150X168.75	150X168.75	150X168.75	150X168.75
Panel Dimension (WxHxD/mm)	600X337.5X27.5	600X337.5X27.5	600X337.5X27.5	600X337.5X27.5	600X337.5X27.5
Panel Resolution	768X432	640X360	480X270	384X216	320X180
Panel weight(kg)	4.5				
Maintenance Mode	Front maintenance				
Cabinet Material	Die-casting aluminum				
Brightness Carlibration	Have				
Brightness(Nits)	≥600				
Color temperature(K)	1000-18500 Optional				
Viewing angle(V/H)	170°/170°				
Brightness/Color uniformity	≥99.8%				
Frame frequency	50/60				
Drive mode	1/64 scan	1/60 scan	1/45 scan	1/48 scan	1/45 scan
Grey level	16bit				
Refresh rate(Hz)	3840				
Max. power consumption(W/sqm)	350				
Avg. power consumption(W/sqm)	100				
Protection level	350				
Power input	AC90-264V/47-63Hz				
Wroking temperature/humidity(°C/ RH)	-20-60°C/10%-85%				
Storage temperature/ humidity(°C/RH)	-20-60°C/10%-85%				