



## DOOH SL-5 series (3D advertising)

Cabinet sizes: 960×640mm, 1440×640mm, 960×960mm and 1440×960mm

Module size: 480X320mm

- Front and rear maintenance
- Curved and Right angles
- Advanced energy-saving solution
- √ High refresh rate










## Product details & specifications


## Can be shaped into curved screens and right-angle screens





## Aluminum module frame

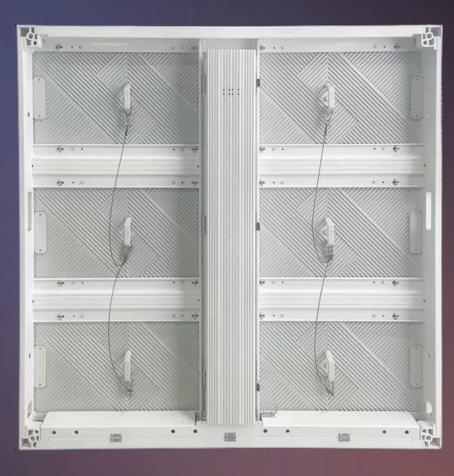

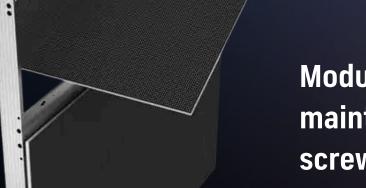

Modules front and rear maintenance, without screws for fast assembly

Pixel pitch	5.7mm	6.66mm	8mm	10mm
LED Configuration	SMD2727	SMD2727	SMD2727	SMD2727
Pixel Density	30625dot/m2	22500dot/m2	15625dot/m2	10000dot/m2
Module size	480*320mm	480*320mm	480*320mm	480*320mm
Module resolution	84*56 dot	72*48 dot	60*40 dot	48*32dot
Cabinet Size	960*960*77mm	960*960*77mm	960*960*77mm	960*960*77mm
Cabinet Resolution	168*168dot	168*168dot	168*168dot	168*168dot
Cabinet Weight	28kg	28kg	28kg	28kg
IP Rating ( front/back)	IP65	IP65	IP65	IP65
View Distance	>5m	>5m	>5m	>5m
Gray Scale	14bit	14bit	14bit	14bit
Display Scale	16.7M	16.7M	16.7M	16.7M
Brightness Adjustment	0-100 levels adjustable	0-100 levels adjustable	0-100 levels adjustable	0-100 levels adjustable
Max.Power Consumption	650W/ <b>m</b> ²	650W/ <b>m</b> ²	650W/ <b>m</b> ²	650W/ <b>m</b> ²
Ave.Power Consumption	200W/m²	200W/m²	200W/m²	200W/m²
Drive Mode	1/7\$	1/6\$	1/4\$	1/2\$
Refresh rate	≥3840HZ	≥3840HZ	≥3840HZ	≥3840HZ
Control Mode	Synchronous display with control PC by DVI			
Support Input	Composite,S-Vido, Component, VGA, DVI, HDMI, HD_SDI			
Operation Power	AC100~240 50/60HZ	AC100~240 50/60HZ	AC100~240 50/60HZ	AC100~240 50/60HZ
Operating Temperature	-20℃~+50℃	-20° <b>C</b> ~ +50° <b>C</b>	-20° <b>C</b> ~ +50° <b>C</b>	-20°C ~ +50°C
Operating Humidity	10 ~95% RH	10 ~95% RH	10 ~95% RH	10 ~95% RH
Operating Life	100,000hours	100,000hours	100,000hours	100,000hours