


Outdoor glass SL-B series

Pixel Pitch: P3.9-7.8mm/ P5.2-10.4mm/ P10.4mm/ P15.6mm

- ✓ Aluminum & Light Weight Cabinet
- ✓ High Transparency
- ✓ Customizable Design
- ✓ Easy Installation and Maintenance
- ✓ Long Outdoor Durability
- ✓ Superior Performance

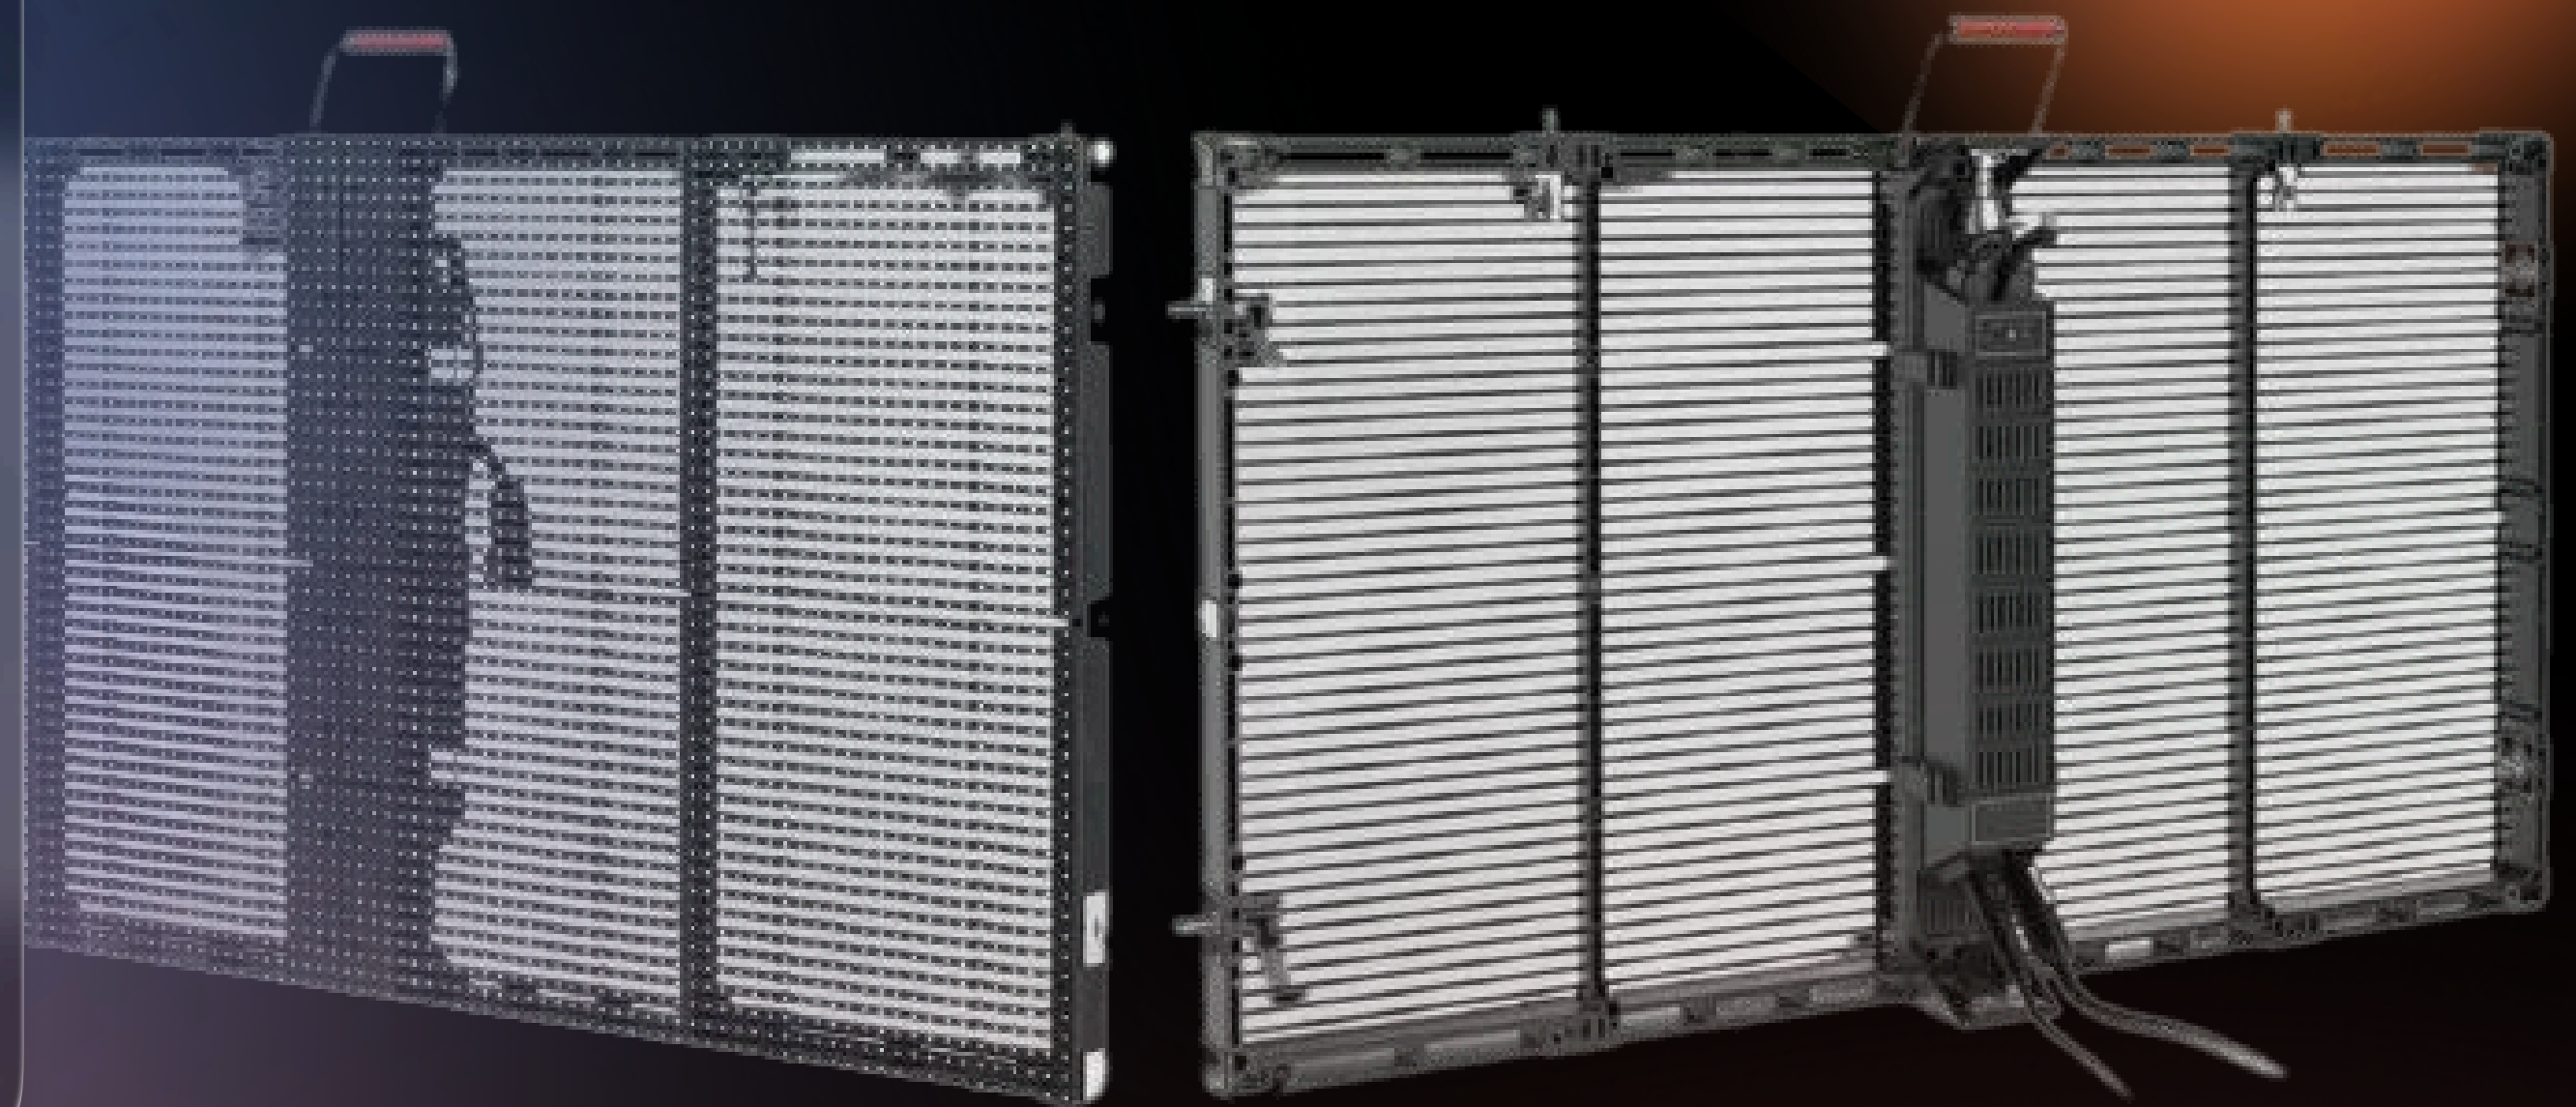

Product details & specifications

Enhanced Transparency



Specifications	P3.9-7.8mm	P5.2-10.4mm	P10.4mm	P15.6mm
LED types	Outdoor SMD1921	Outdoor SMD1921	Outdoor SMD2727	Outdoor SMD2727
Pixel density	32768/m ²	18432/m ²	9216/m ²	4096/m ²
Module size	500*250mm	500*250mm	500*250mm	500*250mm
Cabinet material	Aluminum	Aluminum	Aluminum	Aluminum
Cabinet size	500mm*1000mm	500mm*1000mm	500mm*1000mm	500mm*1000mm
Maintenance way	Rear	Rear	Rear	Rear
Brightness (adjustable)	4500	4500	4500	4500
Grey Scale	14/16	14/16	14/16	14/16
Viewing Angle	140°/140°	140°/140°	140°/140°	140°/140°
Refresh Rate(Hz)	>3840Hz	>3840Hz	>3840Hz	>3840Hz
Max. power consumption (W/m ²)	800	800	800	800
Ave. power consumption (W/m ²)	300	300	300	300
Protection (IP) Ratin	IP65	IP65	IP65	IP65
Power	AC90-264V 47-63Hz	AC90-264V 47-63Hz	AC90-264V 47-63Hz	AC90-264V 47-63Hz
Operating Temperature/Humidity (°C/RH)	-20~60°C / 10%-85%			